

Casambi Input Controller

CI4 AC Item.No.: 10.805


NEW



maintronic






- Casambi input controller
- 4-fold push-button interface
- Tiny dimensions 44x29x16 mm
- Casambi mesh net repeater
- Mains powered

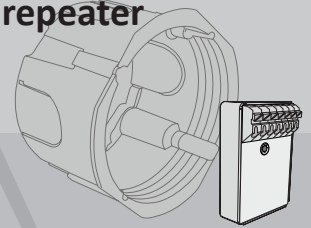

This Casambi controller has 4 push-button inputs suitable for all mains voltage approved push-buttons of the well-known switch manufacturers. The device is operated with mains voltage, the potential of the push button inputs are also mains voltage.

Casambi App automatically identifies the device and can be integrated into existing networks. All functions triggered by the buttons are individually configurable.

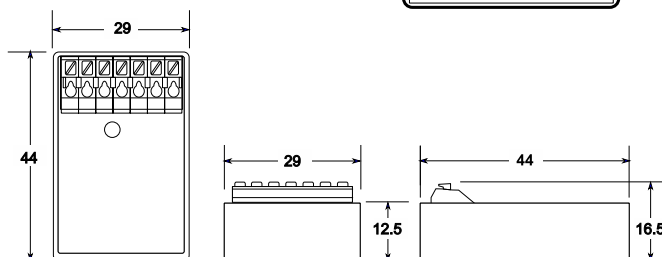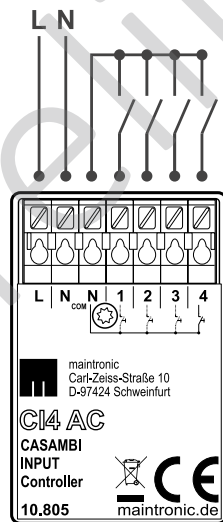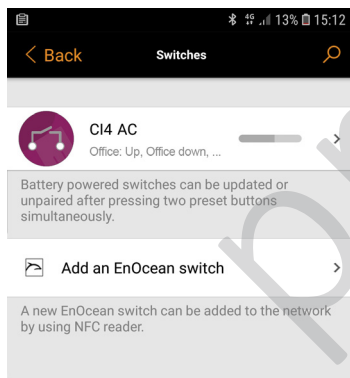

Power supply	100V ... 240V AC 50/60 Hz
Power consumption	1.3W (on idle / switching)
Inputs (push-buttons)	4 Inputs on mains voltage Max. cable length 2m (interference free environment)
Terminals Wiring	push-in spring connectors 0,5 ... 1,5 mm ² (AWG20 ... AWG16) fine/ single-wire 0,5 - 0,75 mm ² fine-wire with ferrule 9 mm (+/- 0,5 mm)
Striping length	9 mm (+/- 0,5 mm)
Type of protection housing Protection class	IP20 II
Temperature ambient ta Temperature critical tc	0°C to +50°C +70°C
Applied standards	CE
Installation	flush-mounted or junction box
Dimensions (height x width x depth)	44 x 29 x 16 mm
Weight	0,009 kg
Housing	plastics, black
HS-Code/ TARIC-Number	85423190

Installation

Even if the device has tiny dimensions, a deep installation box (>60 mm) is highly recommended. Depending on which push-button is used, up to 30 mm of the available space must be deducted.

Security disclaimer

All wiring and the push-buttons must be insulated for the maximum supply voltage. Ensure the appropriate contact protection after installation.

Mistakes and typing errors reserved. maintronic® GmbH All rights reserved. | www.maintronic.de



Carl-Zeiss-Str. 10-14
97424 Schweinfurt / Germany

Tel. +49(0)9721-7766 0
Fax. +49(0)9721-7766 18

www.maintronic.de
info@maintronic.de

Valid from following version: H1a - Document: 10805_TD_en_A4_CI4AC_20201123



Easy commissioning and control by Casambi App